
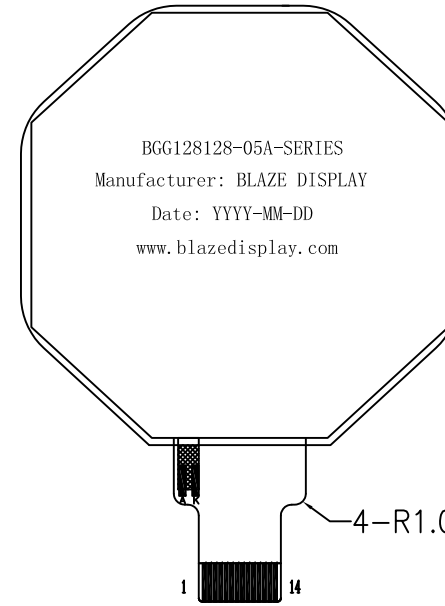



Revised Record

1.0 Add anti-glare and change to positive mode base on BGG128128-05


2017-01-10

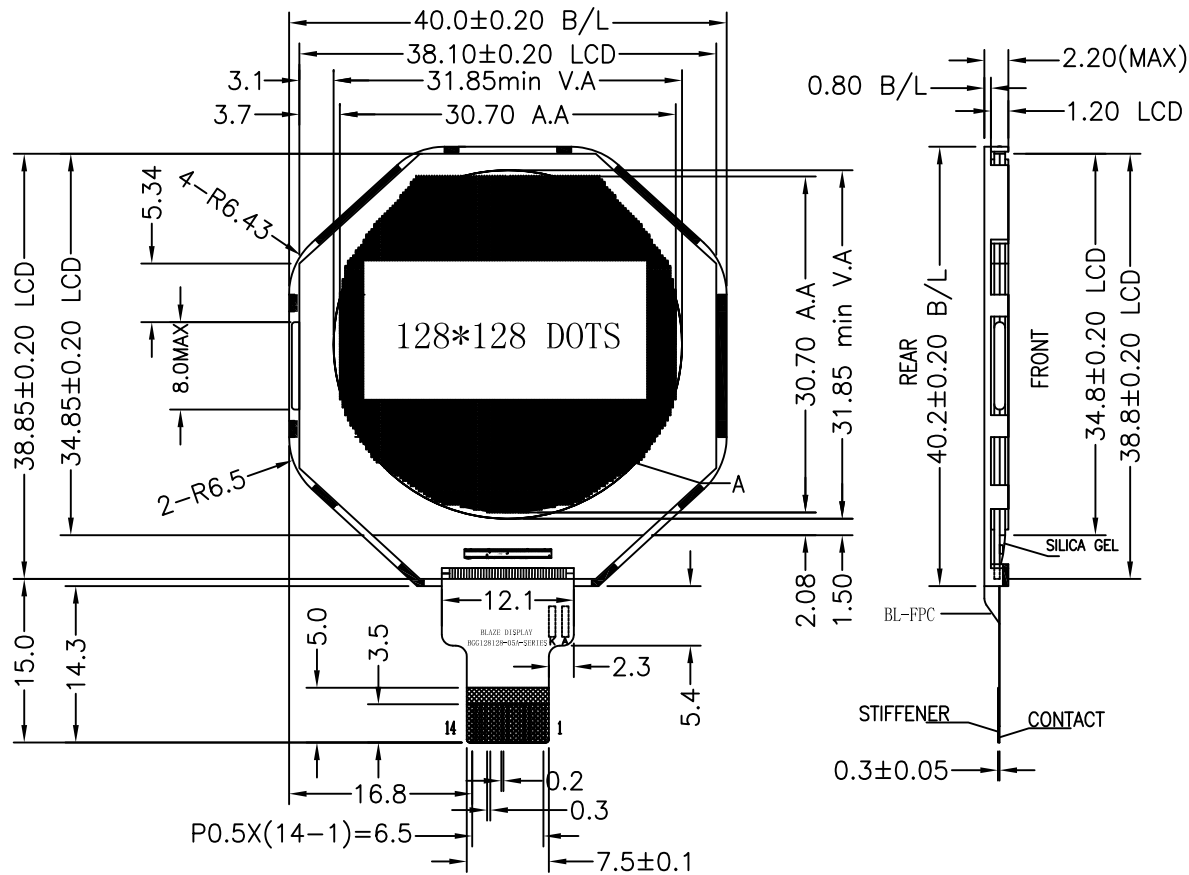

PIN	DESC
1	LED_A (3.1V)
2	LED_K
3	CSB
4	RST
5	AO
6	SCLK
7	SID
8	VDD(3.0V)
9	VSS
10	VMO
11	V0
12	XV0
13	VD1
14	VG



C1~C3: 0805 2.2uF
C4: 0805 0.1uF



DETAIL "A"
SCALE 10/1

NOTES:

- | | |
|----------------------------|--|
| 01. DISPLAY TYPE: | FSTN/POSITIVE/TRANSFLECTIVE(Anti-Glare) RoHS |
| 02. OPERATING VOLTAGE: | VDD=3.0V,VLCD=12.5V |
| 03. OPERATING TEMPERATURE: | -20°C~+60°C |
| 04. STORAGE TEMPERATURE: | -30°C~+70°C |
| 05. DRIVE MODE: | 1/128DUTY,1/12BIAS |
| 06. VIEWING DIRECTION: | 6:00 |
| 07. DRIVE IC: | ST7571 |
| 08. CONNECTOR: | FPC |
| 09. BACKLIGHT: | WHITE,3.1±0.30V,IF<=30mA |
| 10. CUSTOMER'S PART ID: | UNKNOWN |

BLAZE Blaze Display Technology Co.,Ltd.		
DESIGNED BY: BDT-23	BGG128128-05A	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-04		UNIT: mm
Website:http://www.blazedisplay.com		DATE: 2017-01-10